




fashionable since
the 15th century

Pathway width < 1.2m

Cobblestone Straights

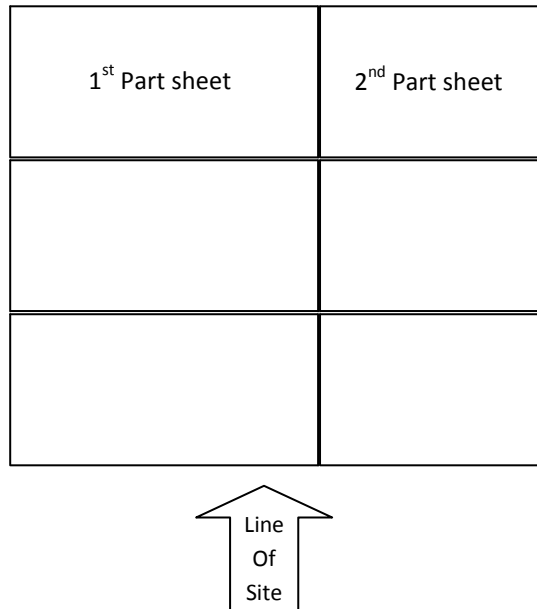

NOTES:

1. To install a row of cobble, take a full sheet of cobble and cut in half, then lay one half with the end of the sheet against a boundary (this is because the ends of each sheet contain half cobbles that look better against any straight edges).
2. Now position the 2nd part cobble sheet with the end of the sheet against the other boundary and overlay this over the top of the 1st part sheet. This will help you determine where to cut the 2nd sheet so that it will fit neatly within the area required. Note that when you cut a cobble sheet, that you can't cut in a straight line, due to the cobble being staggered. This requires you to make sure the cobble from the 1st part sheet will interlock with those from the 2nd part sheet.
3. Any off cuts can be reused, however they should not be used against any boundaries as they do not contain the small cobble at the end of a sheet, that helps create a straight edge.